

## ENECON's DuraQuartz RR Puts Hospital Parking Garage Back In Service In Just 45 Minutes

In Cyprus, the entrance to a hospital's multistory parking garage had severe concrete damage along its in-ground drainage channel from years of heavy vehicle traffic in and out of the garage.

Because of the damaged concrete, the channels were leaking to the parking level below. This needed to be fixed with minimal disruption to the hospital's busy parking garage entrance.


Because of a very successful relationship with the hospital maintenance team, the local ENECON Distributor was contacted to prescribe a reliable and cost effective solution.

It was decided ENECON's rapid return to service DuraQuartz RR would be used to rebuild the broken concrete along the channels.

The damaged concrete surrounding the drainage channel, approximately 80 linear feet, was first removed.

The area was primed with the DuraQuartz RR resins only. The supplied sand was then added and the DuraQuartz RR was then troweled evenly to match the exiting concrete.

Much to the delight of the maintenance team, this garage entrance was put back into service just 45 minutes later.

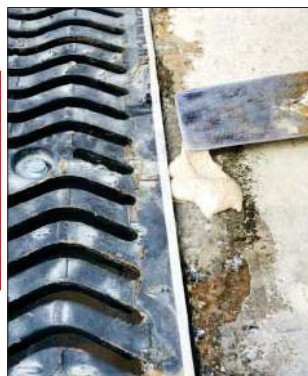

PROENECON SYSTEMS, S.A. · C/ Electricitat, 6. Pol. Ind. La Torre · 08760 - MARTORELL. Barcelona.

Tel: 93 211.15.30 · Fax: 93.253.11.31

Website: [www.proenecon.com](http://www.proenecon.com) · Email: [eneconib@proenecon.com](mailto:eneconib@proenecon.com)