ENECON® NEWS

CH-096

Theme Park Repairs & Protects Concrete Floor With ENECRETE & CHEMCLAD

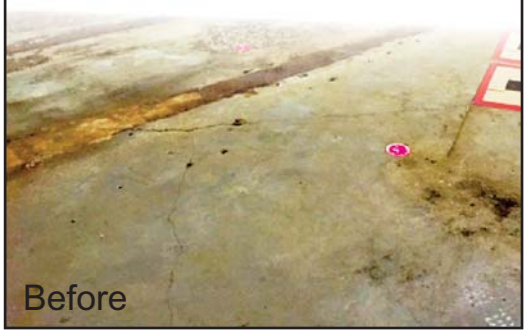

A trash compactor room inside a major theme park in Hollywood - Los Angeles, CA, was suffering from severely corroded and pitted concrete floors. These issues were causing slip, trip and fall concerns for the park's maintenance staff. It was also allowing trash residue to seep into the pores of the concrete, creating an unpleasant odor in the area.

After researching many options, including full concrete replacement, the park maintenance team chose ENECON's *ENECRETE DuraQuartz* to repair the damaged concrete. The concrete was primed with CHEMCLAD P4C, followed by two coats of CHEMCLAD SC. One coat back rolled with silica sand to provide slip resistance, and then the top coat for protection.

The ENECON solution not only repaired and protected the concrete, solved safety issues and reduced the odor but also saved the park $25,000 from having to replace the concrete.

PROENECON SYSTEMS, S.A.· C/ Electricitat, 6. Pol. Ind. La Torre · 08760 - MARTORELL. Barcelona.
·Telf: 93 211.15.30 · Fax: 93.253.11.31
Website: www.proenecon.com · Email: eneconib@proenecon.com

Copyright ©2018 by ENECON® Corporation.

REPAIR - DON'T REPLACE®